


CE1 Series

內軸承式電磁離合器 Internal Bearing-type Magnetic Clutch

附導座 with plating hub

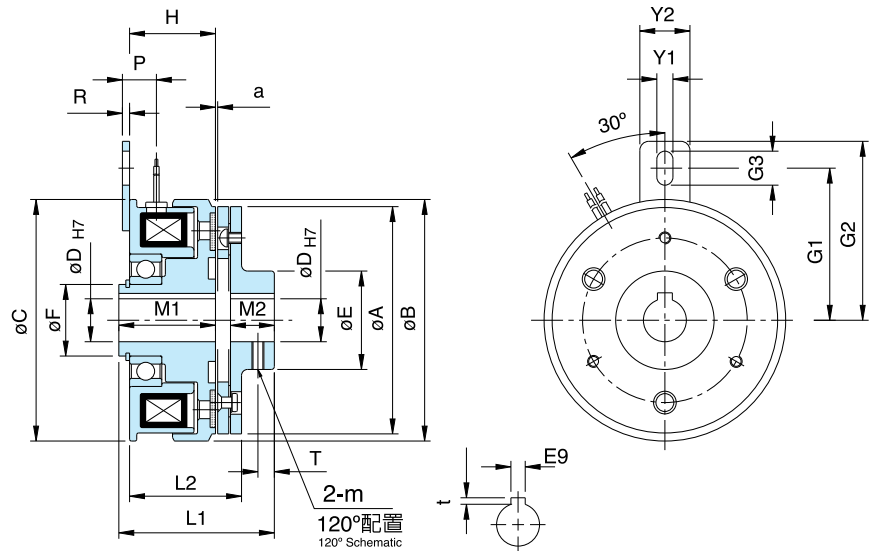

型號 MODEL	CE10S6AA	CE11S5AA	CE12S5AA	CE1005AA	CE1010AA	
靜摩擦轉距 [kgm](Nm) Static Friction Torque	0.55(5.5)	1.1(11)	2.2(22)	4.5(45)	9(90)	
動摩擦轉距 [kgm](Nm) Dynamic Friction Torque	0.5(5.0)	1.0(10)	2.0(20)	4(40)	8(80)	
功率 Power [24V](W) at 20°C	11	15	20	25	35	
徑 方 向 Radius		63	80	100	125	160
	B	67.5	85	106	133	169
	C	67.5	85	106	133	169
	D	12	15	20	25	30
	E	27.5	31	41	49	65
	F	20	25	30	40	50
	H	24	27	30	33.5	38.9
	L1	46.2	54.2	64.9	75	90.7
	L2	32.2	35.6	40.9	46.8	55.4
	M1	27.1	29.5	34	37.7	43.2
	M2	9.5	20	25	30	38
	P	7.5	11.5	11.6	11.6	14.5
	R	2	2	2	2	3
	T	6	8	10	12	14
a	0.2 (±0.05)			0.3 (+0.05/-0.1)		
軸 方 向 Shaft	G1	42.75	55.3	61.75	76.3	98.35
	G2	49.5	63.5	72.5	85	112
	G3	9.5	10.5	15.5	11.4	18.5
	Y1	4.5	5.5	6.5	6.4	8.5
	Y2	12	14	16	16	25
	b	4	5	5	7	7
	t	1.8	2.3	2.3	3.3	3.3
	m	M4*0.7P	M5*0.8P		M6*1P	M8*1.25P
重量 Weight (kg)	0.54	0.95	1.73	3.18	5.6	
保護素子 Prot	470KD07	GD80KD10		GD80KD14		